


MAS



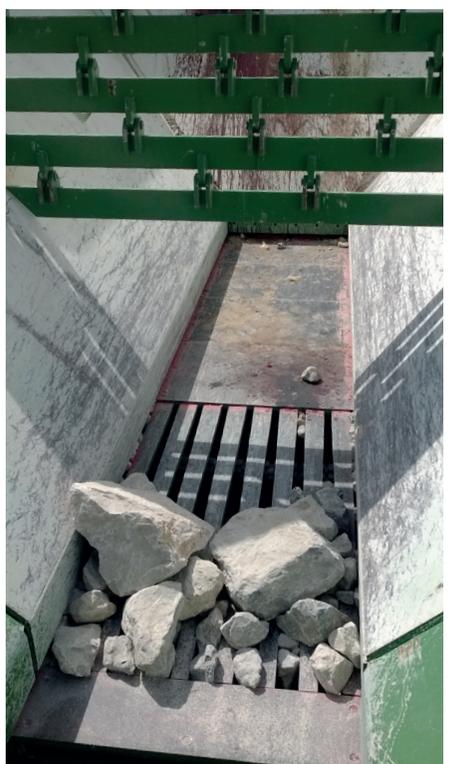

# MAS - "GRIZZLY" SCALPER FEEDER

These feeders are used to feed the primary machines. They are appropriate to treat also large size materials and they rough out the drier feeding material in low humidity sites. The GRIZZLY feeder is composed by a rectangular body in which about half of the base is en-

closed by anti-wear metal sheets, while the remaining part is fitted with selection bars forming a material grading grid that removes the soil and the fine parts that otherwise would overload the crushing machine.

Model	Dimensions (mm)	Max feeding size (mm)	Capacity (t/h)	Power (kW)	Weight (kg)
MAS-090-320	900 x 3200	500	40-100	2,2+2,2	2550
MAS-096-380	960 x 3800	500	80-150	3,7+3,7	3240
MAS-110-490	1100 x 4900	600	120-280	10,6+10,6	5300
MAS-110-590	1100 x 5900	600	250-350	10,6+10,6	6300
MAS-130-600	1300 x 6000	800	350-450	13+13	8800
MAS-150-600	1500 x 6000	1000	350-600	19+19	12900

## APPLICATIONS



Aggregates



Recycling



Industrial sands