



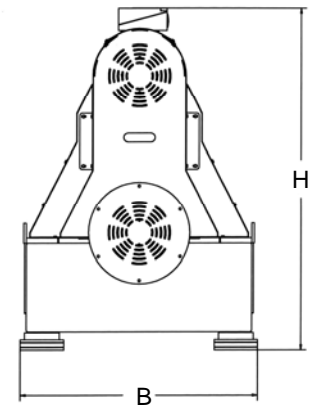

D

DECANTER PER DISIDRATAZIONE FANGHI DECANTER FOR SLUDGE DEHYDRATION DECANTEUR POUR DESHYDRATATION DES BOUES

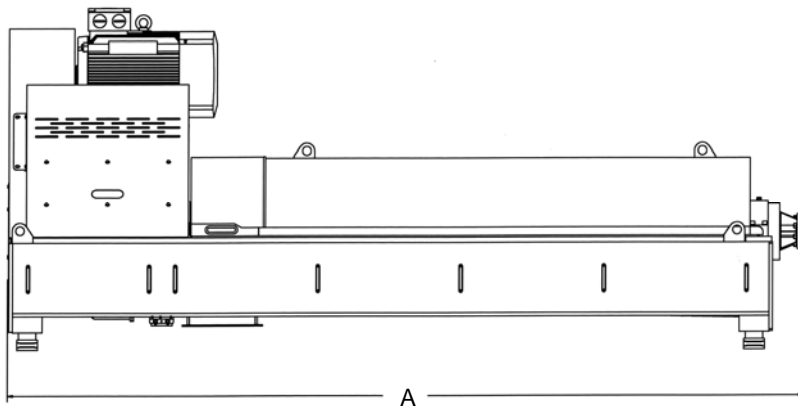

Modello Model Modèle	Portata idraulica Hydraulic capacity Débit hydraulique (l/h)	Produzione solido secco Production of extracted material Production de solide sec (t/h)	TAMBURO DRUM TAMBOUR					Dimensioni Dimensions Dimensions A x B x H (mm)	Potenza Power Puissance (kW)
			Diametro Diameter Diamètre (mm)	Lunghezza Length Longueur (mm)	Snellezza Slenderness Elancement (l/d)	Giri max Max rounds Tours max (RPM)	Ac / g		
D26-045	6000	1-2	260	1170	4,5	5000	3630	2470 x 900 x 1420	7,5
D36-045	12000	3-4	360	1620	4,5	4000	3220	3080 x 950 x 1540	22
D46-045	35000	5-7	460	1980	4,5	3500	3150	4000 x 1100 x 1720	37
D54-044	60000	7-10	540	2376	4,4	3000	2700	4100 x 1250 x 1800	55
D66-044	125000	9-14	660	2904	4,4	2000	1500	4580 x 1350 x 1960	75

I DATI SOPRA RIPORTATI NON SONO IMPEGNATIVI E POSSONO SUBIRE VARIAZIONI SENZA PREAVVISO.
THE ABOVE DATA ARE NOT BINDING AND THEY CAN BE ALTERED WITHOUT NOTICE.
LES DONNÉES SUS-INDIQUÉES NE COMPORTENT AUCUN ENGAGEMENT ET PEUVENT ÊTRE CHANGÉES SANS PRÉAVIS.